



# INSPECTION RESULTS SUMMARY

Report is: Final

330, 4311-12 Street N.E.  
Calgary, AB T2E 4P9  
Bus: (403) 216-3485  
Fax: (403) 216-3486  
solutions@skystone.ca

Client:	ARC Resources Ltd.	LSD:	100/16-24-023-13W4M	PRN:	2551443		
Unit:	Compressor Station	Equipment:	Dehy Tower	Asset Tag #:	A2551443		
Inspector:	Red Flame	SEI Proc:	P0061.FS	Date:	2010.06.04	Owner ID:	A2551443
The following is a summary of the inspection performed. Additional information, where appropriate, is provided as attachments to this summary.							
EXTERNAL							
Fit for continued service, external inspection interval set to 5 yrs as per AB-506. No items of major concern or code deficiencies identified or noted by inspector during the inspection carried out.							
INTERNAL							
Based on the UT thickness readings obtained the vessel has been deemed fit for continued sweet service as Cat 2 vessel, 5 year interval assigned.  Top half of vessel not inspected as a man-lift is required to reach that height.							
PSV							
PSV Verified In Compliance:							
PSV Ser# 88C3151 is set at 9929 kPa which is at vessel MAWP, serviced 04/2009.							
Summary							
Based on a thorough review of information supplied this vessel has been deemed fit for continued service, thorough inspection interval set to 5 yrs as per AB-506 Gr 2 Vessel.							
Post Repair Inspection Required:						Next Intervals:	
Next Inspection Type: UT/NDE						Internal:	
Final Disposition: Fit For Service - As Is						External: 60.0 mth	
Chief Inspector: Preston Yachimec						UT/NDE: 60.0 mth	
Review Date: 2010.09.05						Thorough:	

Generated On: Sep 05, 2010

## Inspection Details

# INSPECTION RESULTS SUMMARY



Overview 1




Overview 2

INSPECTION RESULTS  
SUMMARY



Overview 3

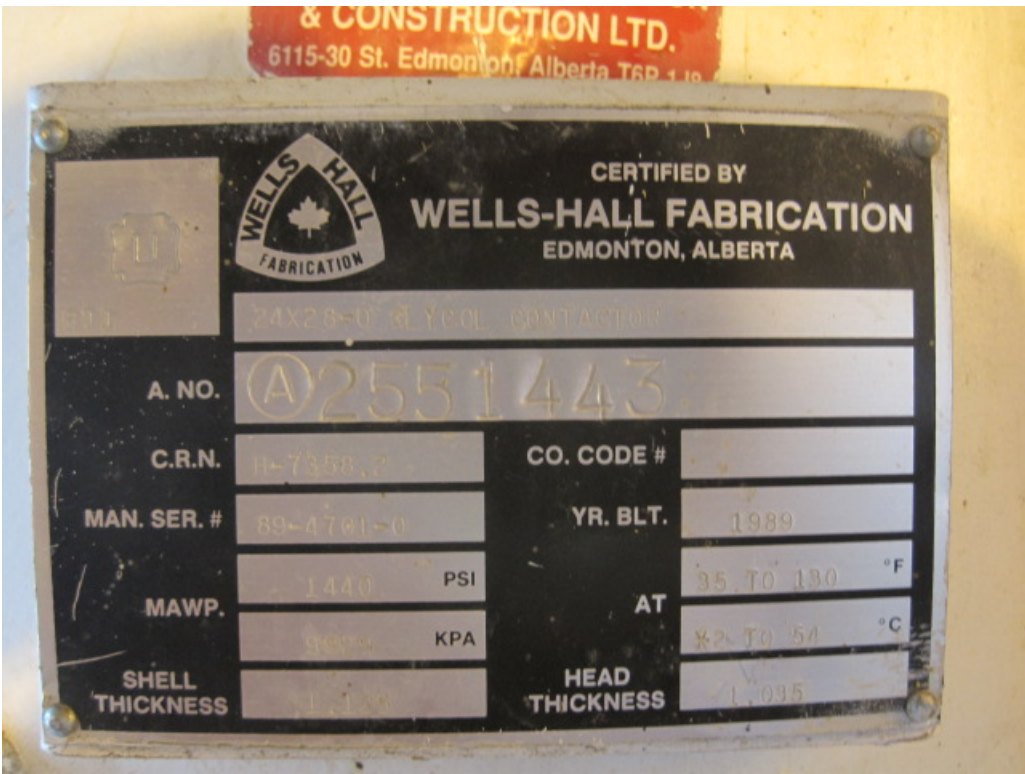

Nameplate

② 2551443

The image shows a blue industrial valve with a yellow label. The label contains the following information:

- VALVE** (at the top)
- Canadian Operations**
- BURLINGTON, ONTARIO, CANADA**
- DATE** (with a handwritten date: 09/01/98)
- VALVE** (with a handwritten number: 2201-1-1-1)
- SERIAL NO.** (with a handwritten number: 220315)
- BACK PRESS.** (with a handwritten number: 1/5)
- STD. CFT. / AIR MIN.** (with a handwritten number: 1003)
- DATE** (with a handwritten date: 08/08/98)
- DATE** (with a handwritten date: 4/1/98)


Generated On: Sep 05, 2010



INSPECTION RESULTS  
SUMMARY



PSV Nameplate 2

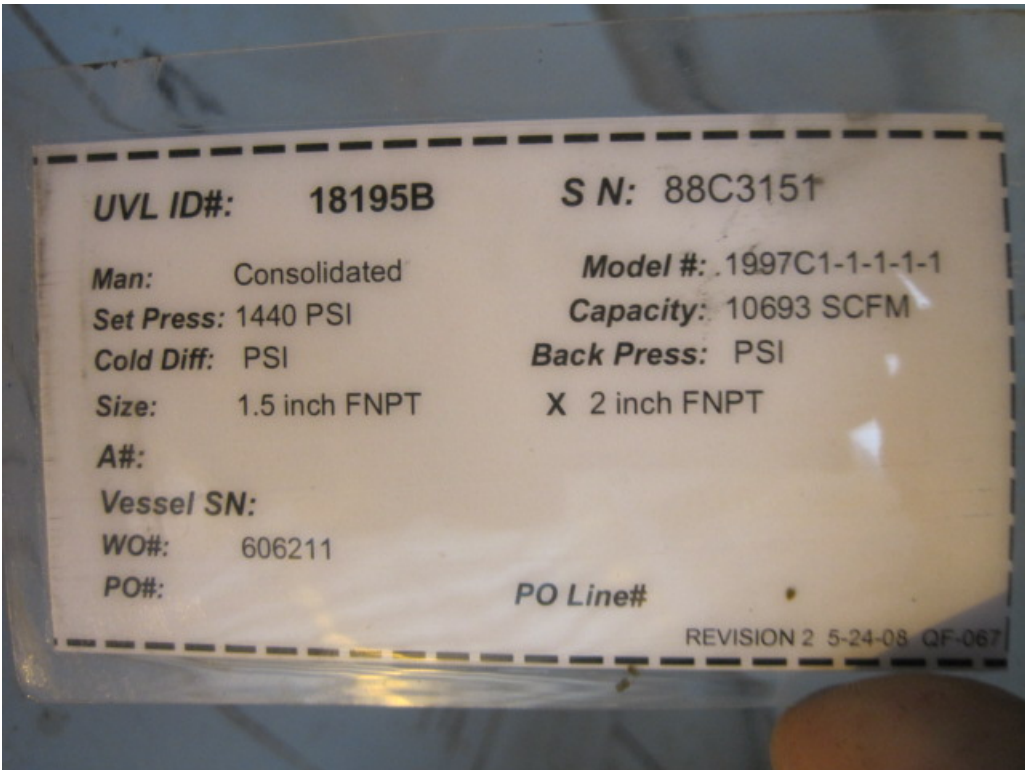

PSV Service Tag