


PSV DATA

MFG: WELLMARK
 MODEL: W139ZV-S
 SERIAL: IBT04562-45
 SET PRES: 6.9 kPa
 CAPACITY: N/S
 SERVICED BY: UNIFIED VALVE
 SERVICE DATE: 01/2012
 SIZE: 2" x 2"
 CODE STAMP: UV
 BLOCK VALVE: NO
 CRN: N/S
 LOCATION: TOP SHELL
 TAG: 19691F

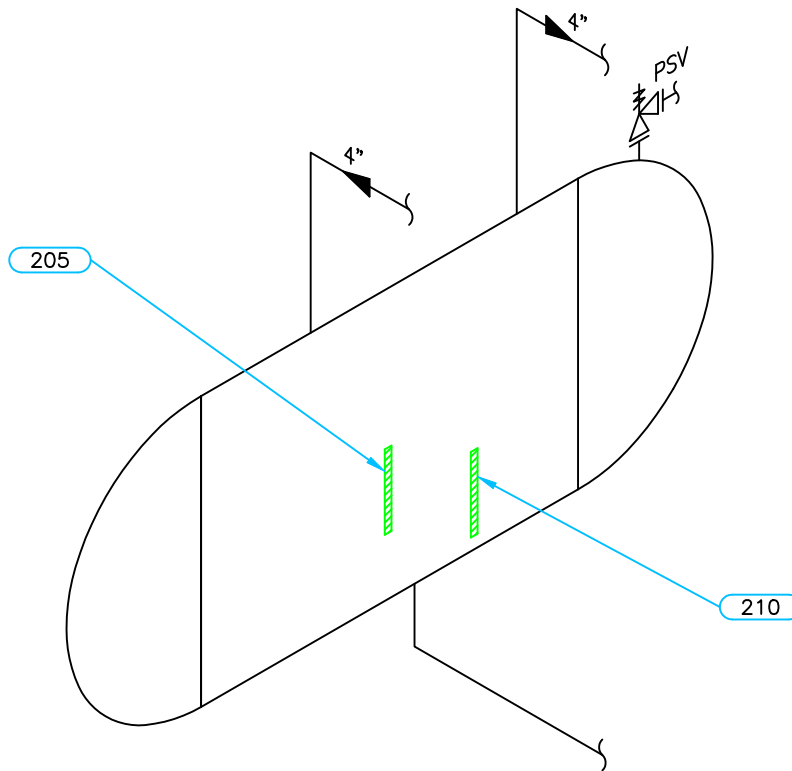

LIMITED ACCESS

Equip. No. _____ Prov. Reg. No. Ⓐ C 47878 C.R.N. NON CODE Serial No. 12189 Yr. Inst. _____
 Code/Div. NON CODE Size: 72in x 120in Manufacturer: BILTON Yr. Blt. 2001
 C. Stamp: _____ Service: SOUR PWHT: NIL Radiography: NIL Insulated: YES

Design & Materials Data

HEAD:
 Top Mat'l. SA 36 Top Nom. 4.8mm Top C.A. 3.2mm
 Btm. Mat'l. _____ Btm. Nom. _____ Btm. C.A. _____
 CHANNEL:
 Material: _____ Nominal: _____ C.A. _____
 BOOT
 Head Mat'l. _____ Head Nom. _____ Head C.A. _____
 Shell Mat'l. _____ Shell Nom. _____ Shell C.A. _____
 SHELL
 Material: SA 36 Nominal: 4.8mm C.A. 3.2mm
 MAWP Shell Side: ATMOS. @ Temp. _____
 MAWP Tube Side: _____ @ Temp. _____

CLIENT	CANADIAN NATURAL RESOURCES	
FACILITY	UMBACH FIELD	
	LSD c-37-F/94-H-03	
ITEM	LOW PRESSURE FLARE KNOCKOUT DRUM	
BY: CW	DATE: 03/2012	DWG.# 33

UTS DATA

CLIENT: CANADIAN NATURAL RESOURCES
EQUIPMENT: LOW PRESSURE FLARE KNOCKOUT DRUI
CRN#:
PROV REG: C 47878
TESTED ON STREAM

FACILITY: UMBACH FIELD
SERVICE: SOUR
LOCATION: c-37-F/94-H-03
RTD JOB #: 10.111395
REFER TO DRAWING: 33

Test Point	THICKNESS DATA				Flag	T-Min	C.A.	Nom.	Short Term	Long Term	Ave. mm/py	Retirement Date
205	Description: LOWER SHELL											
	2012 3											
Min. Thick.	4.9			4.80			4.80					
Average:	5								0		0	
Analysis:												
210	Description: LOWER SHELL											
	2012 3											
Min. Thick.	4.8			4.80			4.80					
Average:	4.9								0		0	
Analysis:												